


Individual mounting Valve only - No base non "plug-in" Conform to ISO 15407/1 Manifold mounting Series

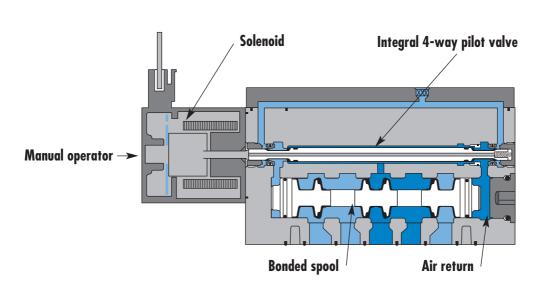

SERIES FEATURES

- \bullet High force MACSOLENOID®.
- Integral 4-way pilot design.
- 2-position, single or double operator.
- 3-position, double solenoid, open center, closed center and pressure center.
- Internal or external pilot.
- Single or dual pressure.

36

32

44

46

42

47

48P

48

400

92

93

ISO 01

ISO 02



Direct solenoid and solenoid pilot operated valves

Function	Port size	Flow (Max)	Individual/Manifold mounting	Series
5/2, 5/3	1/8"	0.43 C _V	Valve only – No base non "plug-in" Conform to	

OPERATIONAL BENEFITS

- 1. Unique patented MACsolenoid® with oval shaped armature for fastest possible response times.
- 2. Balanced poppet 4-way pilot valve provides maximum shifting forces, precise repeatability and consistent operation.
- 3. MAC spool and bore combination wipes away contamination, eliminates sticking and allows for use on non-lube service.
- 4. Large spool area for maximum shifting forces even at minimum operating pressure.
- 5. Very high flow in a compact package. Pilot valve and main valve in the same body.

- 6. Internal or external pilot operation.
- 7. Air only return
- 8. Optional low wattage DC solenoid down to 1.0 Watt.



36

32

37 38

52

67

69

44

46

42

47

48P

48

400

92

93

ISO 01

ISO 1

ISO 2

ISO 3

HOW TO ORDER

SINGLE PRESSURE MODELS

Pilot air	5/2 Single operator	5/2 Double operator	5/3 Closed center	5/3 Open center
	14 4 2 12 17 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	14 4 2 12 T T T T T T T T T T T T T T T T T T T	14 4 2 12 30 12 5 \$\display{1}{\dinta\dioplay{1}{\display{1}{\display{1}{\dioplay{1}{\dioplay{1}{\dioplay{1}{\diop	14 4 2 12 14 12 12 12 12 12 12 12 12 12 12 12 12 12
Internal	MV-A02A-AAMA-J xxx-xxx	MV-A02A-ABMA-J xxx-xxx	MV-A02A-AEMA-J xxx-xxx	MV-A02A-AFMA-J xxx-xxx
External "12" end	MV-A02A-AAMD-J xxx-xxx	MV-A02A-ABMD-J xxx-xxx	MV-A02A-AEMD-J xxx-xxx	MV-A02A-AFMD-Jxxx-xxx
External "14" end	MV-A02A-AAME-J xxx-xxx	MV-A02A-ABME-J xxx-xxx	MV-A02A-AEME-J xxx-xxx	MV-A02A-AFME-J xxx-xxx

DUAL PRESSURE MODELS

COLENIOID ODEDATOD

Pilot air	5/2 Single operator	5/2 Double operator	5/3 Pressure center
	14 4 2 12 14 7 14 7 14 15 15 15 15 15 15 15 15 15 15 15 15 15	14 4 2 12 	14 12 13 14 15 17 17 17 17 17 17 17 17 17 17
Internal from port #3	MV-A02A-ACMB-J xxx-xxx	MV-A02A-ADMB-J xxx-xxx	MV-A02A-AHMB-J xxx-xxx
Internal from port #5	MV-A02A-ACMC-Jxxx-xxx	MV-A02A-ADMC-J xxx-xxx	MV-A02A-AHMC-J xxx-xxx
External from "12" end	MV-A02A-ACMD-J xxx-xxx	MV-A02A-ADMD-J xxx-xxx	MV-A02A-AHMD-J xxx-xxx
External from "14" end	MV-A02A-ACME-Jxxx-xxx	MV-A02A-ADME-J xxx-xxx	MV-A02A-AHME-J <i>xxx-xxx</i>

SOLENC	OID OPERATOR >		J XX	<u>X-XX</u>	_		
				」 ५ ኄ			
XX	Voltage	X	Lead wire length	Х	Manual operator	ХХ	Electrical connection
DA	24V=/5,4W	0	No lead wire/ connector	1	Non-locking	BA	Flying leads
DB	12V=/5,4W	A	45 cm	2	Locking	JA	Square connector
DC	24V=/2,4W	В	60 cm			JC	Square connector with light
DD	12V=/2,4W	С	90 cm	_		JB	Rectangular connector
DE	24V=/1,8W			_		JD	Rectangular connector with light
DU	24V=/1,0W	_				KA	Mini square connector

OPTIONS

Pilot exhaust:

MV-A02A-XX **X** X-J**xxx-xxx**

KD

Mini square connector with light

Other options available, see page 317.
ote: - ISO series, valve and base are ordered separately, see page 229 for base codes.
- If sandwich regulator is required, valve must be ordered as external pilot. For internal pilot regulator use valve with external pilot 12 end, - for external pilot regulator, use valve with external pilot 12 or 14 end.







TECHNICAL DATA

Fluid: Compressed air, vacuum, inert gases

Pressure range: Internal Pilot - 2 pos.: 20 to 120 PSI - 3 pos.: 35 to 120 PSI

External Pilot: Vacuum to 120 PSI

Pilot pressure : 2 pos.: 20 to 120 PSI - 3 pos.: 35 to 120 PSI

Not required, if used select a medium aniline point lubricant (between 180°F and 210°F)

Filtration: 40 µ

Temperature range : $0^{\circ}F$ to $120^{\circ}F$ (- $18^{\circ}C$ to $+50^{\circ}C$)

Flow: 2 pos.: Cv 0.43 – 3 pos.: Cv 0.28

Class A wires continuous duty, #22 AWG x 18

Voltage range: -15% to +10% of nominal voltage


Power: 1,0 to 5,4 W

Options: • Sandwich flow controls: FCA02A-AA (screwdriver slot adjustment).

• Sandwich pressure regulator, see ,Regulators' section

DIMENSIONS

Individual base

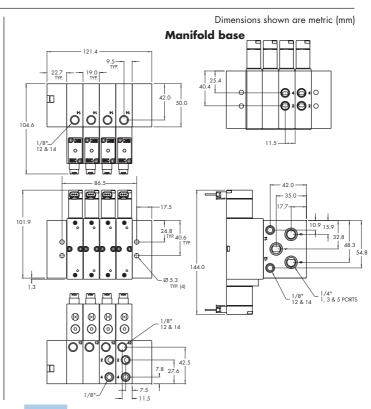



Codification table for voltages / Manual operators / Electrical connections

VALVE CODE ➤

 $J \underbrace{XX}_{1} \underbrace{X-X}_{2} \underbrace{XX}_{4}$

OPTIONS AVAILABLE FOR

- Solenoid valves 36, 46, ISO 01 and ISO 02 Series



	1. VOLTAGE	J-XX X-X XX	
		*JL	Square Connector with Rectifier with light
J-XX X-X XX	VOLTAGE	*JJ	Square Connector Male only (Plain)
AA	120VAC (5.4W)	*JB	Rectangular Connector
AC	24VAC (5.4W)	*JD	Rectangular Connector with light
DE	24VDC (1.8W)	*JN	Rectangular Connector with diode
DF	12VDC (1.8W)	*JP	Rectangular Connector with MOV
DJ	24VDC (1.3W)	*JR	Rectangular Connector with diode/light
DL	12VDC (1.3W)	*J5	Rectangular Connector with MOV/light
DN	12VDC (0.5W)*	*JT	Rectangular Connector with Rectifier
DR	12VDC (1.0W)*	*JU	Rectangular Connector with Rectifier with light
DS .	24VDC (0.5W)*	*JM	Rectangular Connector Male only (Plain)
DU	24VDC (1.0W)*	* Not available on mo	anifold or stacking valves
* Not available on 36	series universal valve		CONNECTORS FOR NON PLUG-IN VALVES
	2. WIRE LENGTH	J-XX X-X XX	MINI SQUARE PLUG-IN CONNECTORS 9.4 MM SPACING BETWEEN PINS
J-XX X-X XX	WIRE LENGTH	KA	Mini plug-in
A	18" coil leads	КВ	Mini plug-in with diode
В	24" coil leads	KC	Mini plug-in with MOV
<u> </u>	36" coil leads	KD	Mini plug-in with light
D	48" coil leads	KE	Mini plug-in with diode and light
E	72" coil leads	KF	Mini plug-in with MOV and light
F	96" coil leads	KG	Mini plug-in with rectifier
P	Base plug-in	KH	Mini plug-in with rectifier and light
0	No leads (use with J, K & L type connectors)	KJ	Mini plug-in – Male only
	1.0.10000 (000 111113) 11.0121/po 001111001010/	KK	Mini plug-in with diode - Male only
	3. MANUAL OPERATOR	KL	Mini plug-in with MOV - Male only
		KM	Mini plug-in with light - Male only
J-XX X-X XX	MANUAL OPERATOR	KN	Mini plug-in with diode and light – Male only
0	No operator	KP	Mini plug-in with MOV and light – Male only
1	Non-locking recessed	KR	Mini plug-in with rectifier – Male only
2	Locking recessed	KS	Mini plug-in with rectifier and light – Male only
3	Non-locking extended		AANNEADA TAR NAN RINA IN VAIVES
4	Locking extended		CONNECTORS FOR NON PLUG-IN VALVES
	20011119 071011000	J-XX X-X XX	MINI SQUARE PLUG-IN CONNECTORS
	4. ELECTRICAL CONNECTION		8.0 MM SPACING BETWEEN PINS ISO SPECIFICATION 15217
	CONNECTORS FOR NON PLUG-IN VALVES	LA	Mini plug-in Mini plug-in with diode
J-XX X-X XX	ELECTRICAL CONNECTION	LC	Mini plug-in with MOV
BA	Flying leads	LD	Mini plug-in with light
GA	MAC JAC solenoid plug-in	LE	Mini plug-in with diode and light
GB	MAC JAC solenoid plug-in with diode	LF	Mini plug-in with MOV and light
GC	MAC JAC solenoid plug-in with MOV	LG	Mini plug-in with rectifier
GD	MAC JAC solenoid plug-in with light		Mini plug-in with recitier
GE	MAC JAC solenoid plug-in with diode and light	LH LJ	Mini plug-in with rectifier and light Mini plug-in – Male only
GF	MAC JAC solenoid plug-in with MOV and light	LJ LK	Mini plug-in – Male only Mini plug-in with diode - Male only
GG	MAC JAC solenoid plug-in with rectifier	LK	Mini plug-in with MOV - Male only
GH	MAC JAC solenoid plug-in with rectifier and light	LM	
GJ	MAC JAC solenoid plug-in – Male only		Mini plug-in with light - Male only Mini plug-in with diode and light - Male only
GK	MAC JAC solenoid plug-in with diode – Male only	LN LP	Mini plug-in with diode and light – Male only Mini plug-in with MOV and light – Male only
GL	MAC JAC solenoid plug-in with MOV – Male only		
GM	MAC JAC solenoid plug-in with light – Male only	LR	Mini plug-in with rectifier – Male only
GN	MAC JAC solenoid plug-in with diode and light – Male only	LS	Mini plug-in with rectifier and light – Male only
GP	MAC JAC solenoid plug-in with MOV and light – Male only	J-XX X-X XX	CONNECTORS FOR PLUG-IN VALVES
GR	MAC JAC solenoid plug-in with rectifier – Male only	FA	Base plug-in
GS	MAC JAC solenoid plug-in with rectifier and light – Male only	FB	Base plug-in with diode
*JA	Square Connector	FC	Base plug-in with MOV
*JC	Square Connector with light	FD	Base plug-in with light
*JE	Square Connector with diode	FE	Base plug-in with diode and light
*JF	Square Connector with MOV	FF	Base plug-in with MOV and light
*JG	Square Connector with diode/light	FG	Base plug-in with rectifier
*JH	Square Connector with MOV/light	FH	Base plug-in with rectifier and light
*JK	Square Connector with Rectifier		1 . 2